

FEATURES:

- Meets ANSI/TIA-568.2-D category 6, ISO/IEC11801-1 and EN50173-1 specification
- IDC connector can accept 22-26 AWG solid and stranded cables
- Supports T568 A&B wiring & easy installation
- Terminate using 110 or Krone tools
- Dimensions and mounting compliant with EIA-310-D
- Panel material: SECC/1.5mm thickness
- Number of ports/height: 24/1U
- Color: black
- Easy port description by removable labels in plastic holders
- Incl. cable ties and set of screws (M6*12)
- ETL Verified
- RoHS compliant



CHARACTERISTICS:

IDC Connector:

Item	Material or Feature
Operating life	Minimum 250 Re-terminations
Contact Material	Phosphor bronze
IDC Contact Plating	Tin plated over Nickel
IDC Plastic Housing	PC, UL94V-0

Jack Connector:

Item	Material or Feature
Operating life	Minimum 750 insertions
Contact Material	Phosphor bronze
Jack Contact Plating	50µ inch thickness gold over Nickel
Jack Plastic Housing	Glass filled polyester UL94V-0




Premium Line Systems GmbH reserves the right to change specifications without prior notice.

APPLICATIONS:

- 1000BASE-TX Gigabit Ethernet
- 1000BASE-T Gigabit Ethernet
- 100BASE-TX Fast Ethernet
- 10BASE-T Ethernet
- Voice, Video and other applications


TYPICAL PERFORMANCE:

Permanent link performance data for Cat.6 unshielded solution

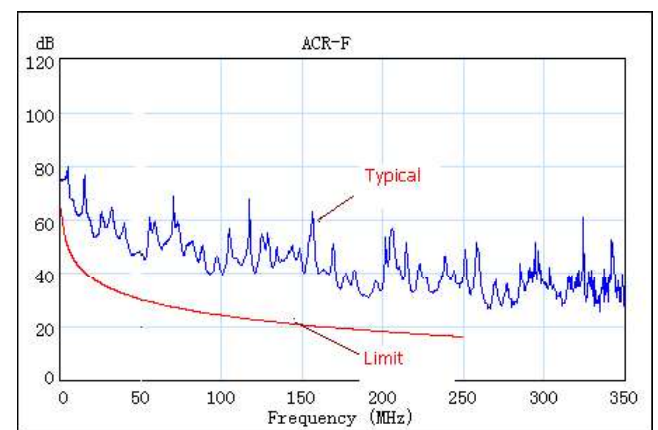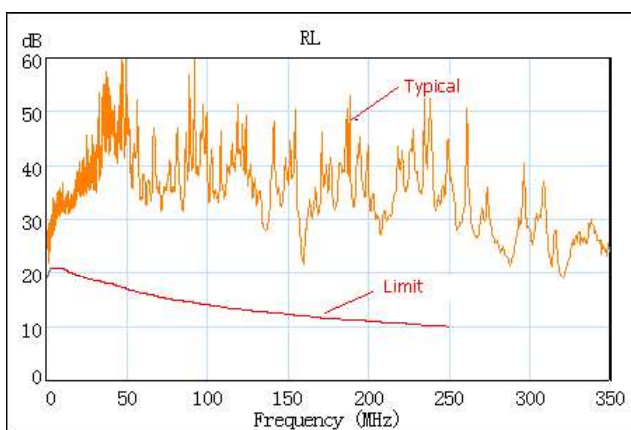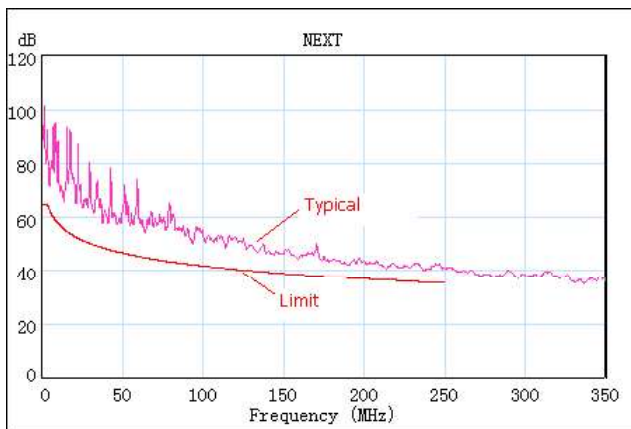

Premium Line Systems GmbH reserves the right to change specifications without prior notice.

DRAWING:

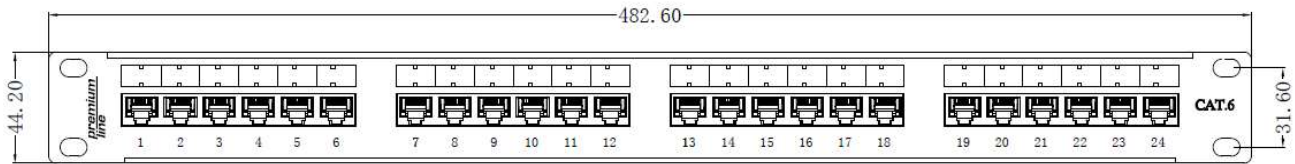

ORDERING INFORMATION:

Part NO. 176722412
Description Cat.6 180° unshielded patch panel with labeling holder, dual IDC, 1U 24ports, black
packing 1pc/box, 20pcs/carton
carton dimension 50*24.5*25.5 cm weight N.W.11.7KG G.W.16KG

Premium-Line Systems GmbH, Rosenheimer Str.89, D-83064 Raubling Germany

► TEL: + 49(0)8035 9836 0 ► Fax: + 49(0)8035 9836 22

Premium Line Systems GmbH reserves the right to change specifications without prior notice.