


Part No: 392100FSHOTGUN-E00
Description: TV100 75 Ohm PVC Black shotgun/figure of 8 cable coaxial cable

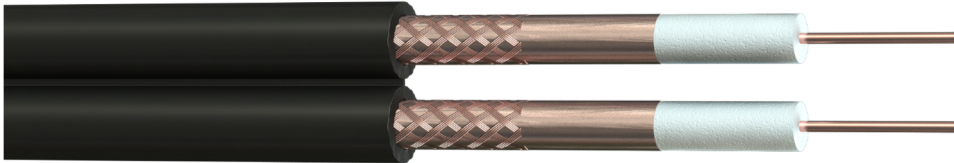

Construction

Conductor Material : Solid Bare Copper
 Conductor Size : 1/1.00 mm
 Dielectric : Foam Polyethylene (FPE)
 Diameter of Dielectric : 4.6 mm
 1st Screen Material : Plain Copper Foil
 2nd Screen Material : Bare Copper Wire Braid (>55% Coverage)
 Outer Sheath Material : Polyvinyl Chloride (PVC)
 Outer Sheath Colour : Black

Electrical Characteristics

Impedance : 75 Ω ± 3
 Capacitance : 53 pF /m ± 3
 Velocity of Propagation : 81 %
 Conductor Resistance @ 20°C : ≤ 26 Ω /km
 Screen Resistance @ 20°C : ≤ 15 Ω /km

Attenuation @ 20°C

Frequency (MHz)	Attenuation (dB/100m)	Frequency (MHz)	Attenuation (dB/100m)
5	< 1.6	860	< 19.5
50	< 4.6	1000	< 21.5
100	< 6.5	1750	< 29.0
200	< 9.5	2150	< 32.5
460	< 15.0		

Return Loss @ 20°C

Frequency (MHz)	Return Loss (dB)
5-470	≥ 23
470-862	≥ 20
862-2150	≥ 18
2150-3000	≥ 18

Physical Characteristics

Overall Diameter : 6.5 x 12.8mm ± 0.3mm
 Bending Radius : 20 x OD
 Temperature Rating : Fixed -15°C to +70°C Flexing -10°C to 70°C
 Weight : 95 kg/km

Standards

RoHS3 Compliant : Yes
 CE Compliant : LVD (2014/35/EU), CPR (305/2011)
 CPR Classification : Eca (EN50575:2014+A1:2016)