


Part No: 392125F5-E00
Description: WF125 5 Core + Earth 75 Ohm Low Smoke & Fume (LSF) Black Coaxial Cable

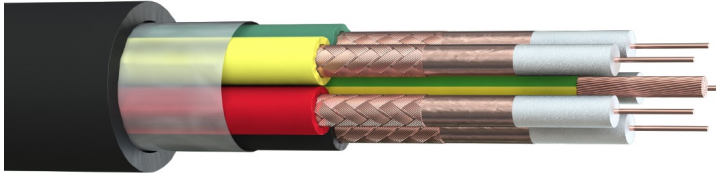

WF100 Coax Construction

Conductor Material : Solid Bare Copper
 Conductor Size : 1/1.25 mm
 Dielectric : Foam Polyethylene (FPE)
 Diameter of Dielectric : 5.7 mm
 1st Screen Material : Plain Copper Foil
 2nd Screen Material : Bare Copper Wire Braid (>40% Coverage)
 Outer Sheath Material : Low Smoke & Fume (LSF)
 Outer Sheath Colour : Black, Red, Yellow, Green, White

Central Earth Conductor

Conductor Material : Bare Copper
 Conductor Size : 4mm², Class 5
 Sheath Material : Polyvinyl Chloride (PVC)
 Sheath Colour : Green/Yellow

Overall Construction

Outer Sheath Material : Low Smoke & Fume (LSF)
 Outer Sheath Colour : Black

Electrical Characteristics

Impedance : 75 Ω ± 3
 Capacitance : 60 pF / m ± 2
 Velocity of Propagation : 81 %
 Conductor Resistance @ 20°C : ≤ 15.0 Ω / km
 Screen Resistance @ 20°C : ≤ 13.5 Ω / km

Attenuation @ 20°C

Frequency (MHz)	Attenuation (dB/100m)	Frequency (MHz)	Attenuation (dB/100m)
5	< 1.6	460	< 11.5
50	< 3.5	860	< 15.5
100	< 5.0	1000	< 17.0
200	< 7.5	1750	< 22.8

Return Loss @ 20°C

Frequency (MHz)	Return Loss (dB)
5-470	≥ 23
470-862	≥ 20
862-2150	≥ 18

Physical Characteristics

Overall Diameter : 24.0 mm (±0.5mm)
 Bending Radius : 10 x OD
 Temperature Rating : Fixed -15°C to +70°C Flexing -5°C to 70°C
 Weight : 710 kg/km

Standards

Flame Retardant : BS EN 60332-1-2
 RoHS3 Compliant : Yes
 CE Compliant : LVD (2014/35/EU), CPR (305/2011)
 CPR Classification : Eca (EN50575:2014+A1:2016)